

«LONDON»


RHYTHMIC GYMNASTICS EXERCISE FLOOR

REF. 6667



GYMNOVA
SUPPORTEUR OFFICIEL

FIG-approved, this competition floor, measuring 14 x 14 meters, was used at the Olympic Games in London (2012), Rio (2016) and Paris (2024) and several World Championships including Kiev (2013) and Valencia (2023).

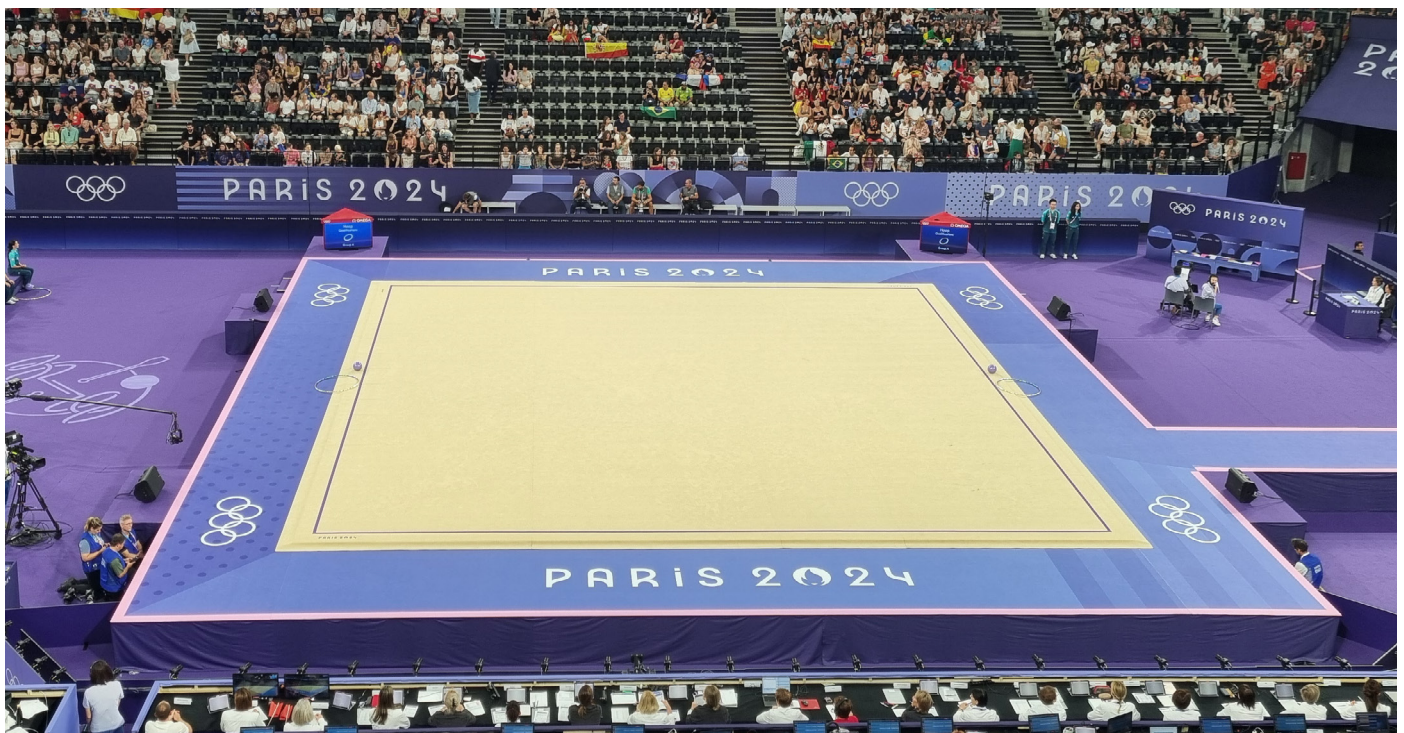

Used in major Rhythmic Gymnastics competitions, this exercise floor offers gymnasts effective resilience thanks to its consistent gymnastics area. Its excellent vibratory impact absorption reduces strain injuries on wrists and ankles during sequences.

It is quick and easy to set up and the 13 x 13 metre peripheral markings provide a reassuring visual outline of the gymnastics area.

This exercise floor provides a safe, flat working surface ensuring the stability and accuracy of the exercises performed.

ADVANTAGES

PERFORMANCE

The exercise floor is designed with a consistent gymnastics area over its entire surface, providing highly efficient resilience to support successful execution of very challenging sequences.

COMFORTABLE IN USE

The materials used in the production of this exercise floor, in particular for the carpet, provide optimum absorption of impacts in jumps and acrobatic movements. This helps to protect gymnasts' health by reducing risks of strain injuries on the wrists and ankles.

EASY SET-UP

The exercise floor can be set up quickly and easily. The 13-metre peripheral markings also provide a clearer view of the gymnastics area for greater reassurance when practising.



TECHNICAL SPECIFICATIONS

LONDON Exercise floor

- F.I.G. approved
- Overall dimensions : 14 x 14 m
- Thickness : 46 mm
- Peripheral markings : 13 x 13 m




GR CARPET - REF. 6655



- Dimensions = 14 x 14 m
- Composed of 3 strips measuring 14 x 4 m and 1 strip measuring 14 x 2 m.
- The 13 x 13 m area is defined by red adhesive Velcro strips. The outer edges of this Velcro mark the measurement limits of the 13 m area.

- The perimeter finishing is done with a «overlock» stitch.
- The material of the carpet: polyamide PA6, antistatic, tufted, soft.
- Total height of the carpet: 7 mm
- Height of the carpet fibers: 4.5 mm
- Number of fibers: 244,000 units/m² with a high density of 1480 g/m²
- The carpet is fire-rated according to the European standard CFL S1 as per EN13501-1 and classified M3 according to French standards.
- Roll-up options are available: see below in the associated products.

RG FLOOR BASE - REF. 6665

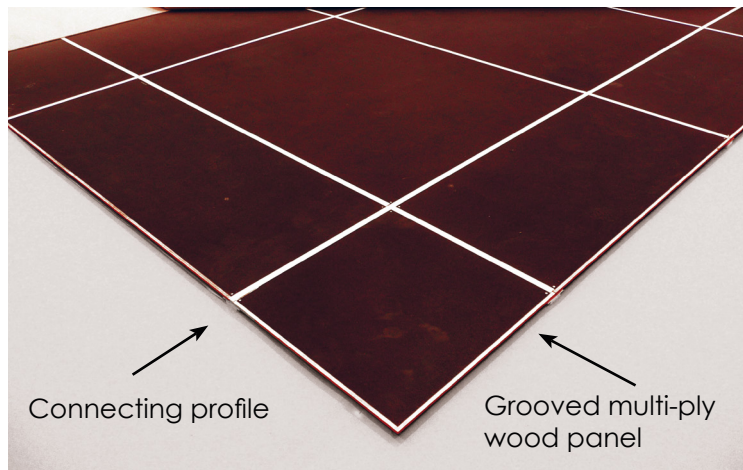


- Dimensions = 13.50 x 13.50 m
- Thickness = 4 cm
- 12 mm thick plywood, 9 alternating birch plies, and 28 mm thick dynamic foam pads on the underside of the flooring.
- The panels are joined using interlocking profiles, ensuring a uniform surface.

This wooden floor is made up of grooved panels for the insertion of joining profiles and is treated for moisture resistance, thanks to a water-resistant phenolic film covering both sides. The underside of the flooring is smooth for adhesion of the foam pads, while the upper surface is embossed for carpet stabilization and grip.

This flooring consists of:

- 48 full floor panels (200 x 150 x 4 cm)
- 4 corner edges (75 x 75 x 4 cm)
- 16 floor edges (150 x 75 x 4 cm)
- 12 floor edges (200 x 75 x 4 cm)
- 54 plastic joining profiles (197.4 cm)
- 63 plastic joining profiles (149.7 cm)
- 18 plastic joining profiles (72.6 cm)
- 63 plastic joining plates
- 36 half joining plates
- It is equipped with 28 mm thick Évazote foam pads, made of polyethylene, with 41 pads per full pane

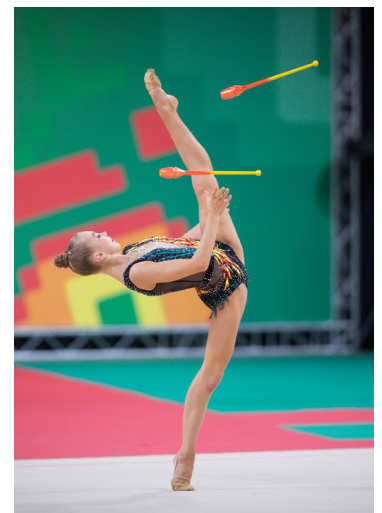


DOWNLOAD THE ASSEMBLY INSTRUCTIONS

ASSOCIATED PRODUCTS

CARPET REEL TROLLEYS

REF. 6670 & 6672 & 6673

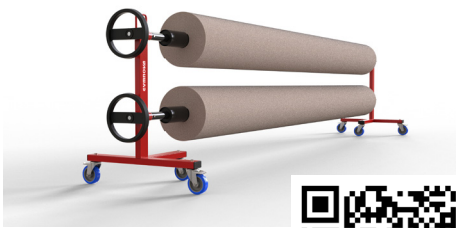

Ref. 6673



Dimensions: 4 m (Ref. 6670 & 6673) and 2 m (Ref. 6672).

- With omnidirectional transport wheels.
- Equipment required to roll a complete RG carpet:
= 3 Ref. 6670 + 1 Ref. 6672 or 2 Ref. 6673.

[DOWNLOAD THE ASSEMBLY INSTRUCTIONS](#)

BALLET BARRE - REF. 2220

- Ref. 2220: Wooden ballet barre: 1.60 m
- Ref. 2217: Double bracket barre support
- Ref. 2216: Single bracket barre support
- Ref. 2215: Barre support without brackets



Ref. 2220

WALL BARS - REF. 2315-2325-2335-2345-2355-2365-2370



Ref. 2345

- Ref. 2315 to 2365: Wall bars with 1 to 6 sections.
- Ref. 2370: Detachable wall bar protection (attaches to wall bar refs. 2315 to 2365).